

CD4029BC Presettable Binary/Decade Up/Down Counter

General Description

The CD4029BC is a presettable up/down counter which counts in either binary or decade mode depending on the voltage level applied at binary/decade input. When binary/decade is at logical "1", the counter counts in binary, otherwise it counts in decade. Similarly, the counter counts up when the up/down input is at logical "1" and vice versa.

A logical "1" preset enable signal allows information at the "jam" inputs to preset the counter to any state asynchronously with the clock. The counter is advanced one count at the positive-going edge of the clock if the carry in and preset enable inputs are at logical "0". Advancement is inhibited when either or both of these two inputs is at logical "1". The carry out signal is normally at logical "1" state and goes to logical "0" state when the counter reaches its

maximum count in the "up" mode or the minimum count in the "down" mode provided the carry input is at logical "0" state.

All inputs are protected against static discharge by diode clamps to both V_{DD} and V_{SS} .

Features


- Wide supply voltage range: 3V to 15V
- High noise immunity: $0.45 V_{DD}$ (typ.)
- Low power TTL compatibility: fan out of 2 driving 74L or 1 driving 74LS
- Parallel jam inputs
- Binary or BCD decade up/down counting

Ordering Code:

| Order Number | Package Number | Package Description |
|--------------|----------------|---|
| CD4029BCWM | M16B | 16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide body |
| CD4029BCSJ | M16D | 16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide |
| CD4029BCN | N16E | 16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide |


Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

Connection Diagram

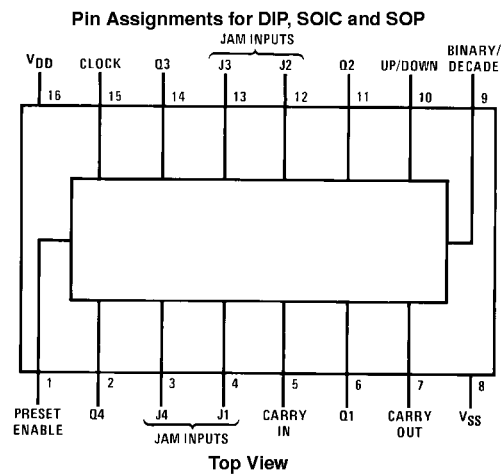

CD4029BC

Logic Diagram

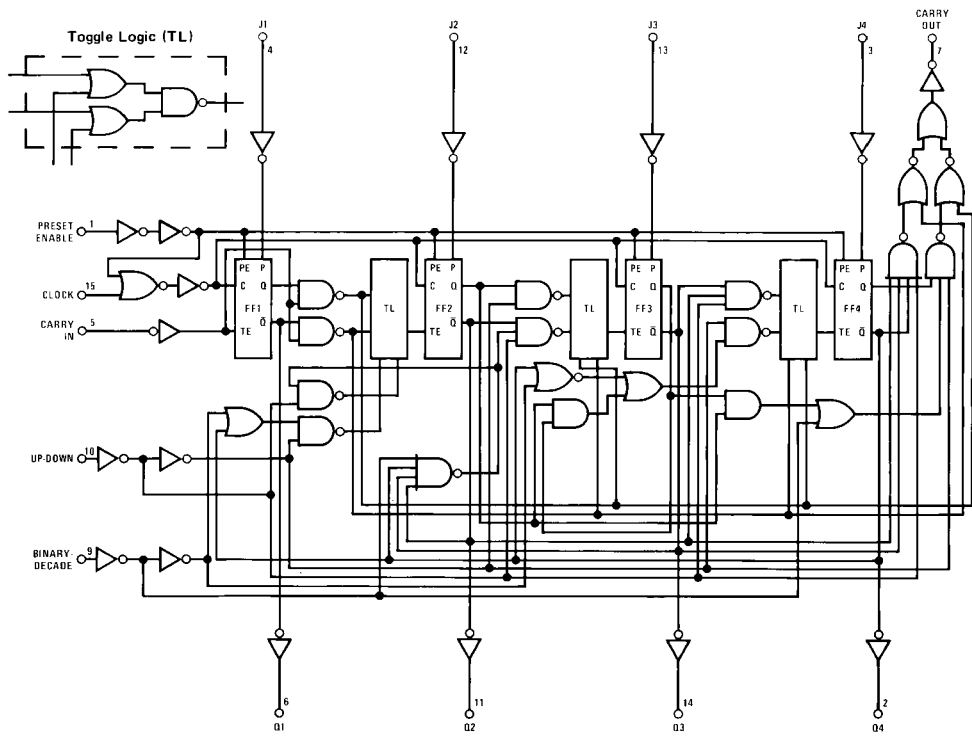

Absolute Maximum Ratings (Note 1)

(Note 2)

| | |
|-------------------------------------|--------------------------------|
| DC Supply Voltage (V_{DD}) | -0.5V to +18 V_{DC} |
| Input Voltage (V_{IN}) | -0.5V to $V_{DD} + 0.5 V_{DC}$ |
| Storage Temperature Range (T_S) | -65°C to +150°C |
| Power Dissipation (P_D) | |
| Dual-In-Line | 700 mW |
| Small Outline | 500 mW |
| Lead Temperature (T_L) | |
| (Soldering, 10 seconds) | 260°C |

Recommended Operating Conditions (Note 2)

| | |
|---------------------------------------|-----------------------|
| DC Supply Voltage (V_{DD}) | 3V to 15 V_{DC} |
| Input Voltage (V_{IN}) | 0V to $V_{DD} V_{DC}$ |
| Operating Temperature Range (T_A) | -40°C to +85°C |

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

Note 2: $V_{SS} = 0V$ unless otherwise specified.

DC Electrical Characteristics (Note 2)

| Symbol | Parameter | Conditions | -40°C | | +25°C | | | +85°C | | Units |
|----------|------------------------------------|---------------------------------------|-------|------|-------|------------|------|-------|------|---------|
| | | | Min | Max | Min | Typ | Max | Min | Max | |
| I_{DD} | Quiescent Device Current | $V_{DD} = 5V$ | | 20 | | | 20 | | 150 | μA |
| | | $V_{DD} = 10V$ | | 40 | | | 40 | | 300 | μA |
| | | $V_{DD} = 15V$ | | 80 | | | 80 | | 600 | μA |
| V_{OL} | LOW Level Output Voltage | $ I_O < 1 \mu A$ | | | | | | | | |
| | | $V_{DD} = 5V$ | | 0.05 | | 0 | 0.05 | | 0.05 | V |
| | | $V_{DD} = 10V$ | | 0.05 | | 0 | 0.05 | | 0.05 | V |
| | | $V_{DD} = 15V$ | | 0.05 | | 0 | 0.05 | | 0.05 | V |
| V_{OH} | HIGH Level Output Voltage | $ I_O < 1 \mu A$ | | | | | | | | |
| | | $V_{DD} = 5V$ | 4.95 | | 4.95 | 5 | | 4.95 | | V |
| | | $V_{DD} = 10V$ | 9.95 | | 9.95 | 10 | | 9.95 | | V |
| | | $V_{DD} = 15V$ | 14.95 | | 14.95 | 15 | | 14.95 | | V |
| V_{IL} | LOW Level Input Voltage | $V_{DD} = 5V, V_O = 0.5V$ or $4.5V$ | | 1.5 | | | 1.5 | | 1.5 | V |
| | | $V_{DD} = 10V, V_O = 1V$ or $9V$ | | 3.0 | | | 3.0 | | 3.0 | V |
| | | $V_{DD} = 15V, V_O = 1.5V$ or $13.5V$ | | 4.0 | | | 4.0 | | 4.0 | V |
| V_{IH} | HIGH Level Input Voltage | $V_{DD} = 5V, V_O = 0.5V$ or $4.5V$ | 3.5 | | 3.5 | | | 3.5 | | V |
| | | $V_{DD} = 10V, V_O = 1V$ or $9V$ | 7.0 | | 7.0 | | | 7.0 | | V |
| | | $V_{DD} = 15V, V_O = 1.5V$ or $13.5V$ | 11.0 | | 11.0 | | | 11.0 | | V |
| I_{OL} | LOW Level Output Current (Note 3) | $V_{DD} = 5V, V_O = 0.4V$ | 0.52 | | 0.44 | 0.88 | | 0.36 | | mA |
| | | $V_{DD} = 10V, V_O = 0.5V$ | 1.3 | | 1.1 | 2.25 | | 0.9 | | mA |
| | | $V_{DD} = 15V, V_O = 1.5V$ | 3.6 | | 3.0 | 8.8 | | 2.4 | | mA |
| I_{OH} | HIGH Level Output Current (Note 3) | $V_{DD} = 5V, V_O = 4.6V$ | -0.52 | | -0.44 | -0.88 | | -0.36 | | mA |
| | | $V_{DD} = 10V, V_O = 9.5V$ | -1.3 | | -1.1 | -2.25 | | -0.9 | | mA |
| | | $V_{DD} = 15V, V_O = 13.5V$ | -3.6 | | -3.0 | -8.8 | | -2.4 | | mA |
| I_{IN} | Input Current | $V_{DD} = 15V, V_{IN} = 0V$ | | -0.3 | | -10^{-5} | -0.3 | | -1.0 | μA |
| | | $V_{DD} = 15V, V_{IN} = 15V$ | | 0.3 | | 10^{-5} | 0.3 | | 1.0 | μA |



Note 3: I_{OH} and I_{OL} are tested one output at a time.

AC Electrical Characteristics (Note 4)T_A = 25°C, C_L = 50 pF, R_L = 200k, Input t_{rCL} = t_{fCL} = 20 ns, unless otherwise specified


| Symbol | Parameter | Conditions | Min | Typ | Max | Units | | |
|--------------------------------------|---|------------------------|-------------------------------|----------------------|-----|-------|-----|----|
| CLOCKED OPERATION | | | | | | | | |
| t _{PHL} or t _{PLH} | Propagation Delay Time to Q Outputs | V _{DD} = 5V | | 200 | 400 | ns | | |
| | | V _{DD} = 10V | | 85 | 170 | ns | | |
| | | V _{DD} = 15V | | 70 | 140 | ns | | |
| t _{PHL} or t _{PLH} | Propagation Delay Time to Carry Output | V _{DD} = 5V | | 320 | 640 | ns | | |
| | | V _{DD} = 10V | | 135 | 270 | ns | | |
| | | V _{DD} = 15V | | 110 | 220 | ns | | |
| t _{PHL} or t _{PLH} | Propagation Delay Time to Carry Output | C _L = 15 pF | | | | | | |
| | | V _{DD} = 5V | | 285 | 570 | ns | | |
| | | V _{DD} = 10V | | 120 | 240 | ns | | |
| t _{PHL} or t _{PLH} | Propagation Delay Time to Carry Output | V _{DD} = 15V | | 95 | 190 | ns | | |
| | | V _{DD} = 5V | | 100 | 200 | ns | | |
| | | V _{DD} = 10V | | 50 | 100 | ns | | |
| t _{THL} or t _{TLH} | Transition Time/Q or Carry Output | V _{DD} = 15V | | 40 | 80 | ns | | |
| | | V _{DD} = 5V | | 160 | 320 | ns | | |
| | | V _{DD} = 10V | | 70 | 135 | ns | | |
| t _{WH} or t _{WL} | Minimum Clock Pulse Width | V _{DD} = 15V | | 55 | 110 | ns | | |
| | | V _{DD} = 5V | 15 | | | μs | | |
| | | V _{DD} = 10V | 10 | | | μs | | |
| t _{rCL} or t _{fCL} | Maximum Clock Rise and Fall Time | V _{DD} = 15V | 5 | | | μs | | |
| | | V _{DD} = 5V | | 180 | 360 | ns | | |
| | | V _{DD} = 10V | | 70 | 140 | ns | | |
| t _{SU} | Minimum Set-Up Time | V _{DD} = 15V | | 55 | 110 | ns | | |
| | | V _{DD} = 5V | | 1.5 | 3.1 | MHz | | |
| | | V _{DD} = 10V | | 3.7 | 7.4 | MHz | | |
| f _{CL} | Maximum Clock Frequency | V _{DD} = 15V | | 4.5 | 9 | MHz | | |
| | | C _{IN} | Average Input Capacitance | Any Input | | 5 | 7.5 | pF |
| | | C _{PD} | Power Dissipation Capacitance | Per Package (Note 5) | | 65 | | pF |
| PRESET ENABLE OPERATION | | | | | | | | |
| t _{PHL} or t _{PLH} | Propagation Delay Time to Q output | V _{DD} = 5V | | 285 | 570 | ns | | |
| | | V _{DD} = 10V | | 115 | 230 | ns | | |
| | | V _{DD} = 15V | | 95 | 195 | ns | | |
| t _{PHL} or t _{PLH} | Propagation Delay Time to Carry Output | V _{DD} = 5V | | 400 | 800 | ns | | |
| | | V _{DD} = 10V | | 165 | 330 | ns | | |
| | | V _{DD} = 15V | | 135 | 260 | ns | | |
| t _{WH} | Minimum Preset Enable Pulse Width | V _{DD} = 5V | | 80 | 160 | ns | | |
| | | V _{DD} = 10V | | 30 | 60 | ns | | |
| | | V _{DD} = 15V | | 25 | 50 | ns | | |
| t _{REM} | Minimum Preset Enable Removal Time | V _{DD} = 5V | | 150 | 300 | ns | | |
| | | V _{DD} = 10V | | 60 | 120 | ns | | |
| | | V _{DD} = 15V | | 50 | 100 | ns | | |
| CARRY INPUT OPERATION | | | | | | | | |
| t _{PHL} or t _{PLH} | Propagation Delay Time to Carry Output | V _{DD} = 5V | | 265 | 530 | ns | | |
| | | V _{DD} = 10V | | 110 | 220 | ns | | |
| | | V _{DD} = 15V | | 90 | 180 | ns | | |
| t _{PHL} , t _{PLH} | Propagation Delay Time to Carry Output | C _L = 15 pF | | | | | | |
| | | V _{DD} = 5V | | 200 | 400 | ns | | |
| | | V _{DD} = 10V | | 85 | 170 | ns | | |
| t _{PHL} , t _{PLH} | Propagation Delay Time to Carry Output | V _{DD} = 15V | | 70 | 140 | ns | | |

Note 4: *AC Parameters are guaranteed by DC correlated testing.**Note 5:** C_{PD} determines the no load AC power consumption of any CMOS device. For complete explanation, see 74C Family Characteristics application note, AN-90.


Logic Waveforms

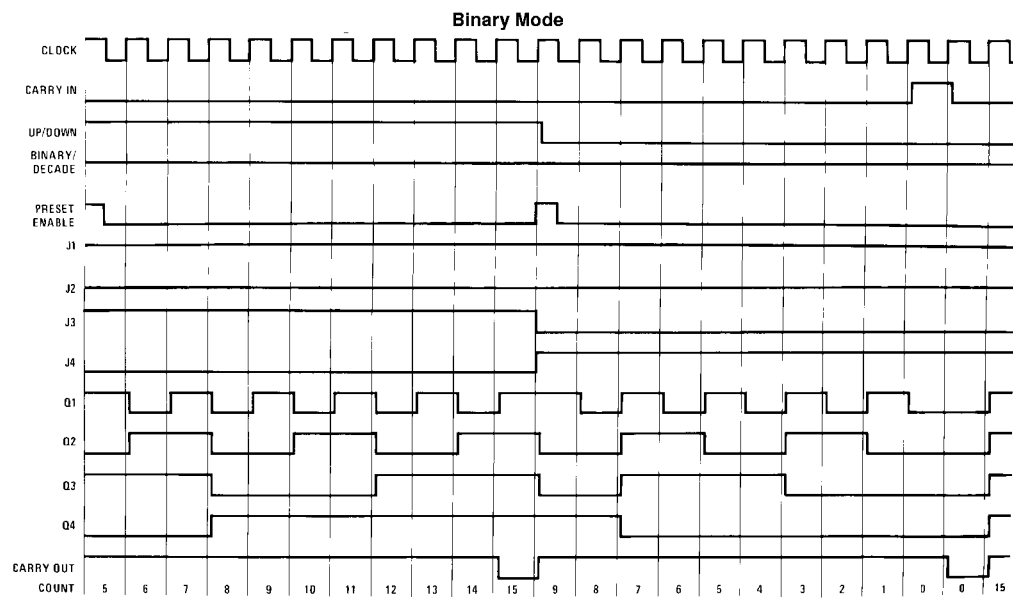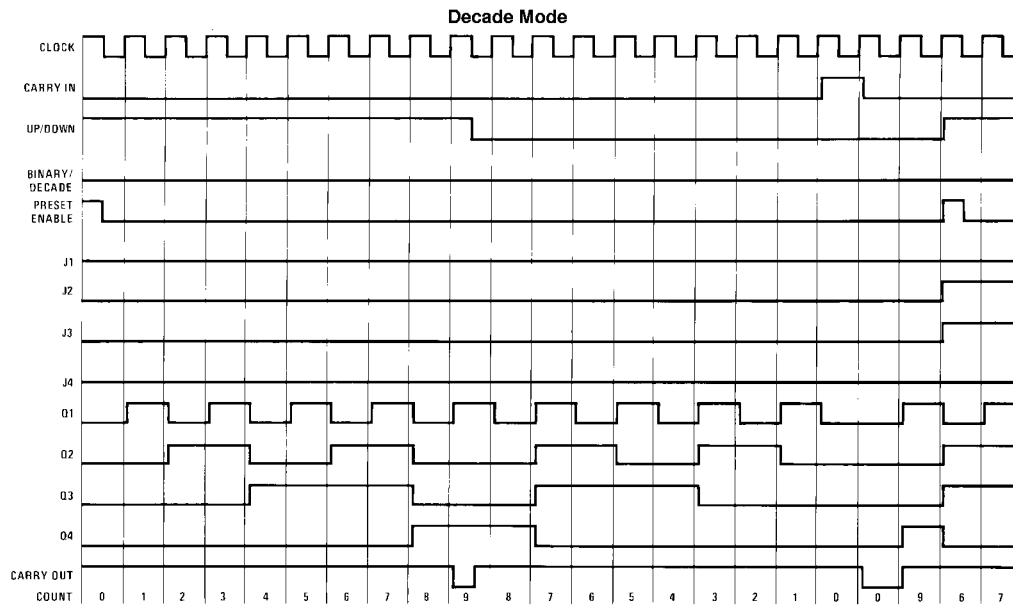

Switching Time Waveforms

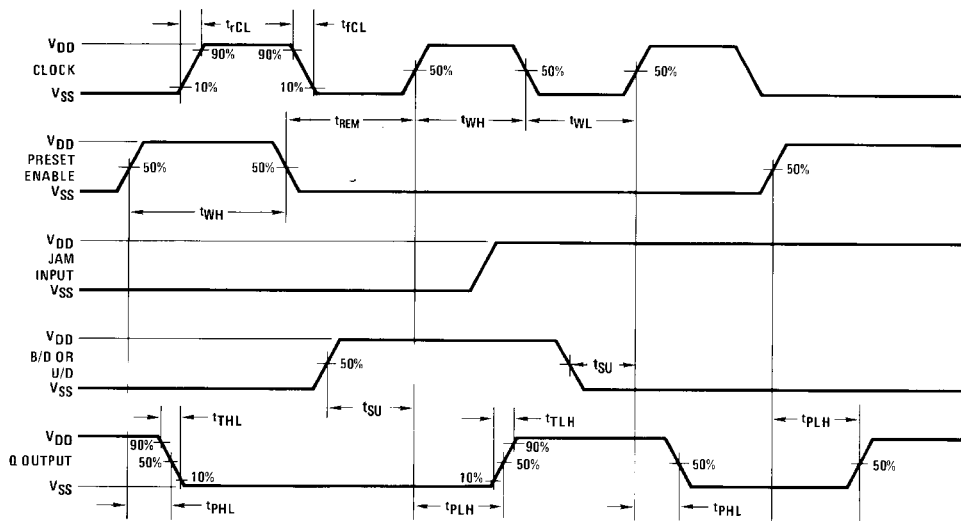


Cascading Packages

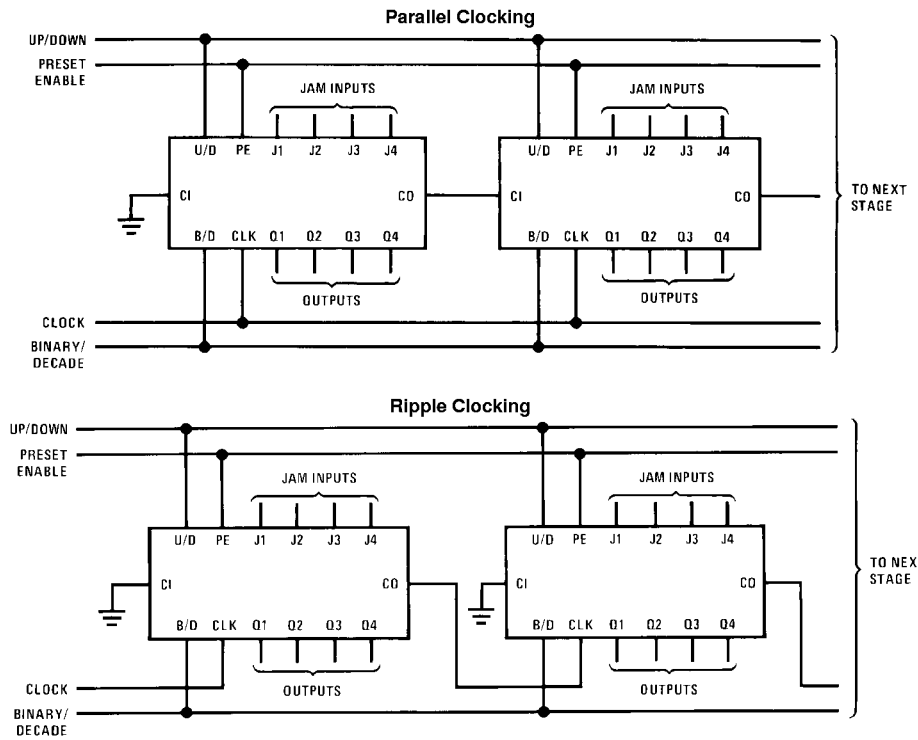


Carry out lines at the 2nd or later stages may have a negative-going spike due to differential internal delays. These spikes do not affect counter operation, but if the carry out is used to trigger external circuitry the carry out should be gated with the clock.

Physical Dimensions inches (millimeters) unless otherwise noted

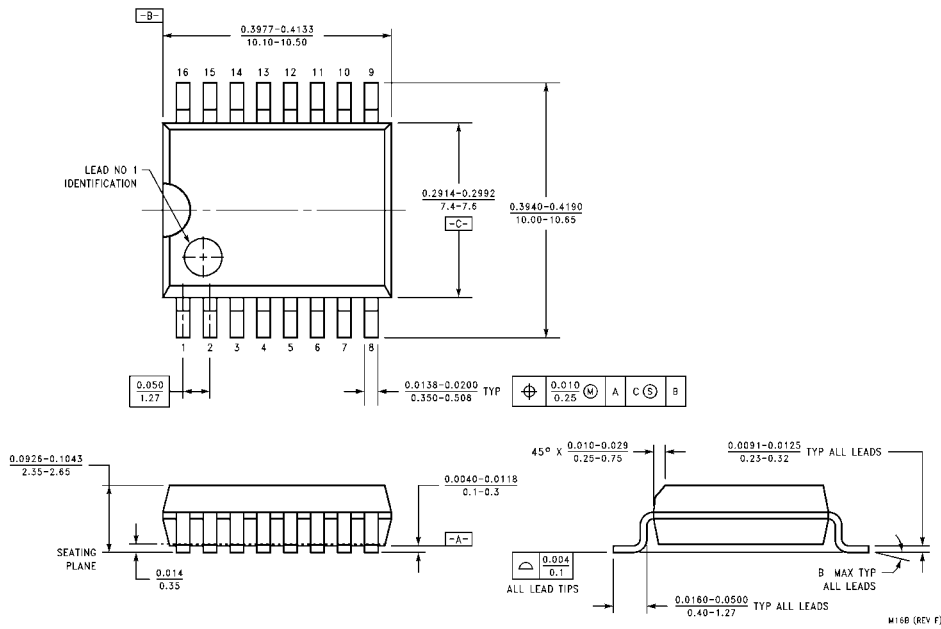


16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide Body Package Number M16B

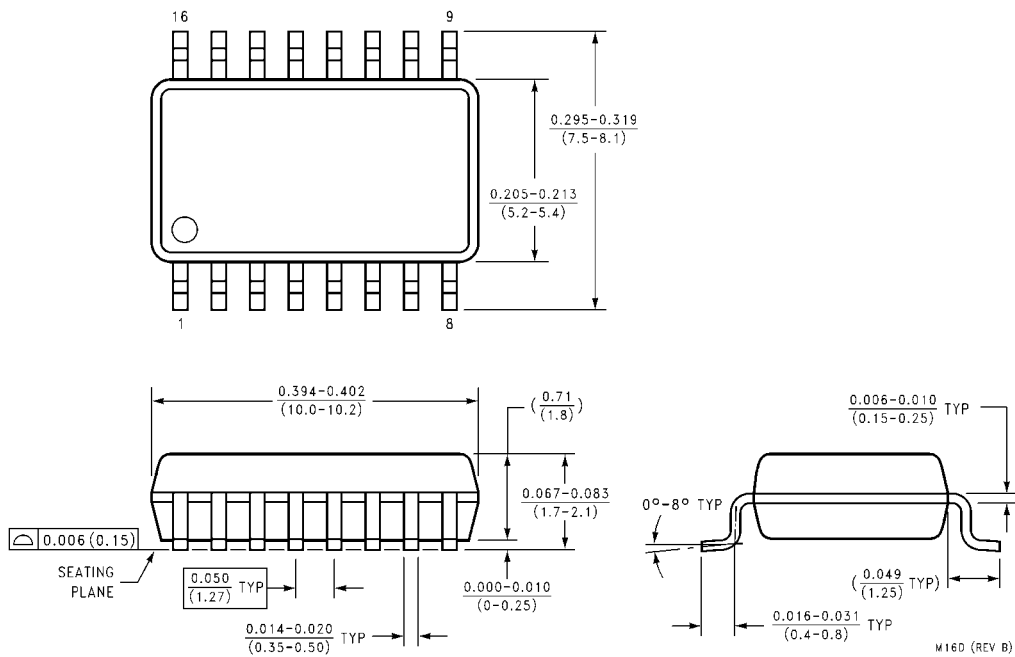

16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide Package Number M16D

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

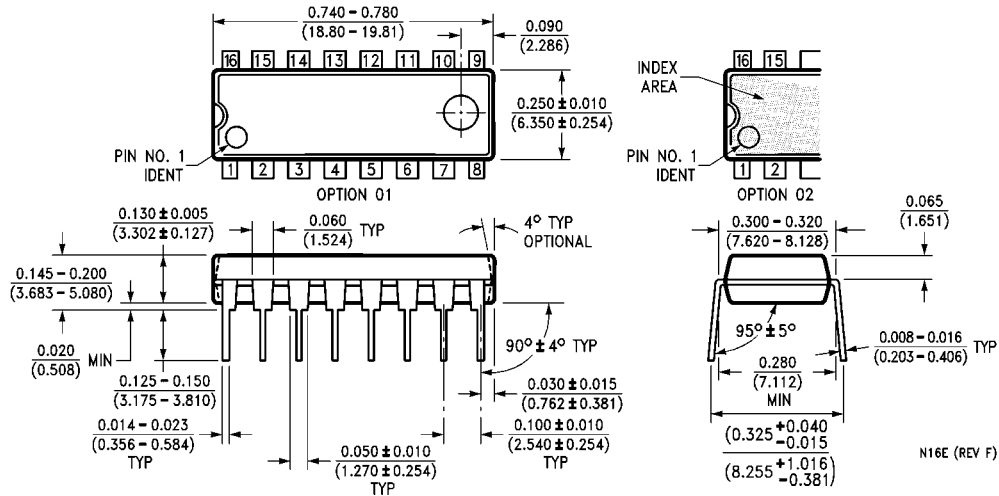

**16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide
Package Number N16E**

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com